




More Easy, More Safe, More Efficiency.

Pop-up Roller Conveyor

Technical Data

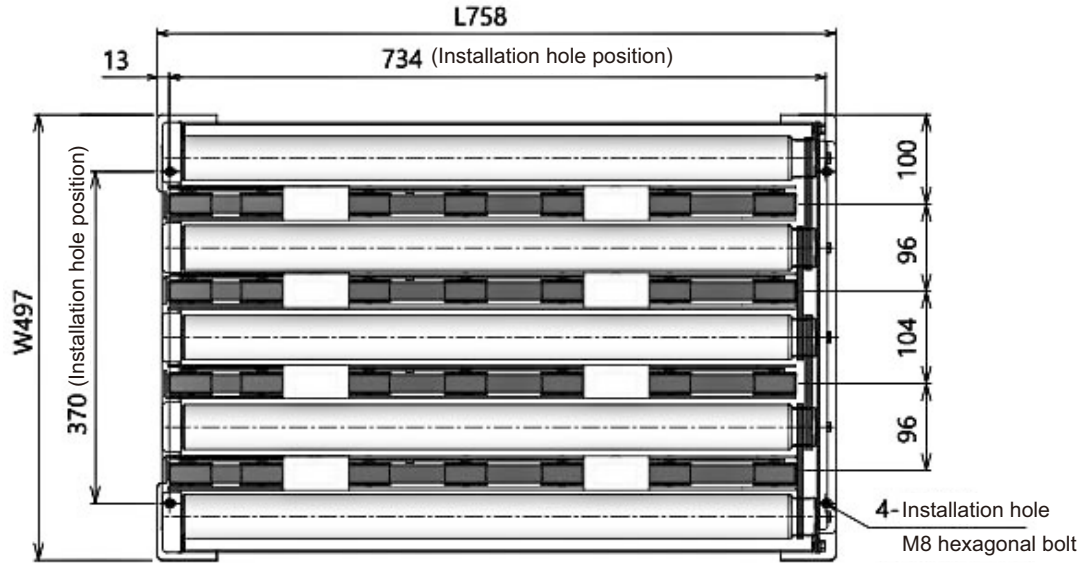

Gentle transport

Min. products size to be conveyed
250 × 250 mm



MAX 50kg

2000 parcels/hour

14010 Technical Data

Specification	A	W379×L758 mm	Material size	W300×L300 mm - W300×L650 mm	
	B	W497×L758 mm		W300×L300 mm - W400×L650 mm	
	C	W597×L758 mm		W300×L300 mm - W500×L650 mm	
	D	W697×L758 mm		W300×L300 mm - W600×L650 mm	
Frame height	200 mm				
Roller diameter	Φ 50 mm				
Conveyor speed	30 m/min , 60 m/min , 90 m/min				
Max. weight of goods allowable	30 m/min	A	37.5 kg	B / C / D	50 kg
	60 m/min		37.5 kg		50 kg
	90 m/min		10 kg		10 kg
Pop-up mechanism type	Pneumatic / Roller drive				
Output signal type	N...NPN Output		P...PNP Output		

Pop-up Roller Conveyor 14010



Feature :

Wide adaptability, easy installation, strong control, high safety, maintenance-free, low failure.

APOLLO pop-up roller conveyor gets high cost performance.

APOLLO pop-up roller conveyor realizes the gentle transport for goods, widely used in various fields in sorting and conveying. Through the modular and standardized design, it can combine with most of the customer's conveyor lines.

APOLLO pop-up roller conveyor provides a low impact, high performance steering delivery with damage-free to materials. With high fatigue strength and long service life, it is the ideal right angle transfer for small or medium-sized sorting sites.





APOLLO MEDIA CENTER

You can find more from our website:

- Rich resource media center and selection guide on how to choose APOLLO products.
- Application reports from different industries cover a variety of operational possibilities.
- Quick product survey and contact information of our system consultants.

www.sz-apollo.com



WeChat
consultation



WeChat public
account

 amy@sz-apollo.com



+86-512-6569 8859



+86-151 5140 8535 Amy



No. 5527 Wuzhong avenue, Wuzhong dist, Suzhou, China